
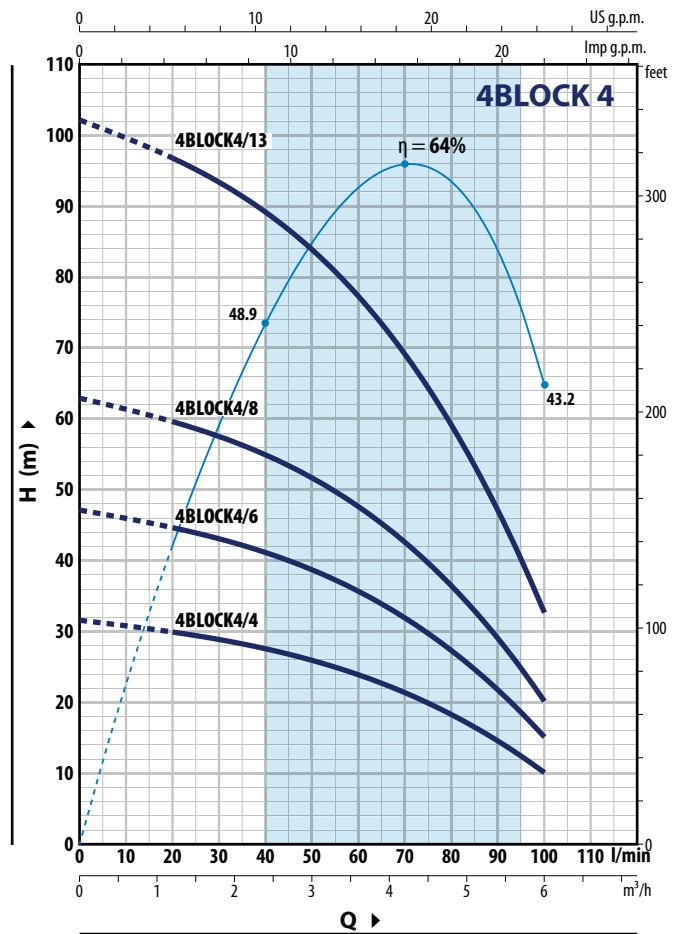


4BLOCK® 4" monoblock submersible pumps

CHARACTERISTIC CURVES AND PERFORMANCE DATA 50 Hz n= 2900 min⁻¹

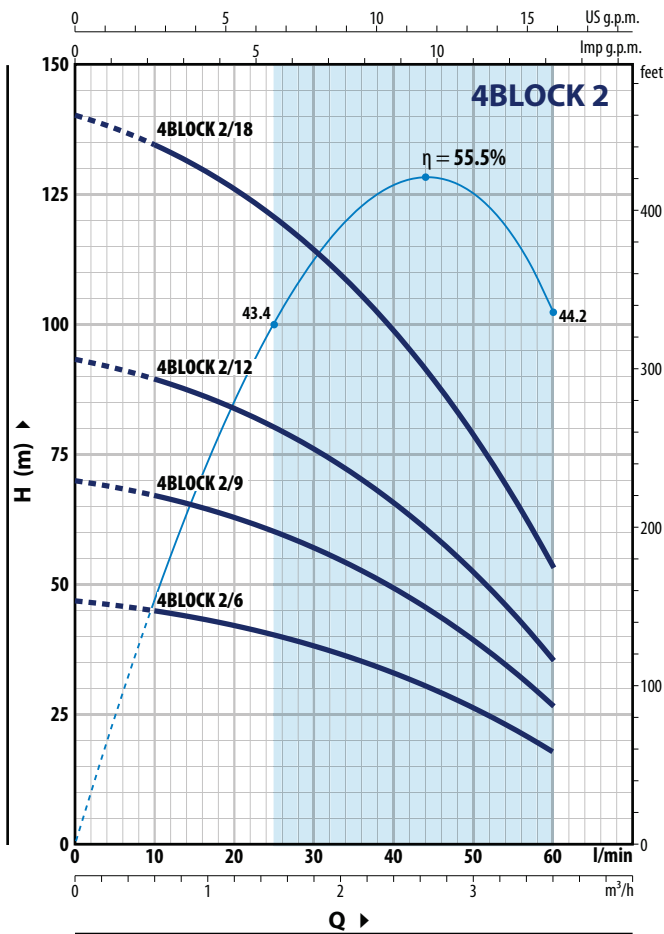

4BLOCK 2

MODEL	POWER (P ₂)		Q	Flow rate								
	kW	HP		m ³ /h	l/min	US g.p.m.	feet	US g.p.m.	feet			
Single-phase				0	0.6	1.2	1.8	2.4	3.0	3.6		
				0	10	20	30	40	50	60		
4BLOCKm 2/6	0.37	0.50	H metres	47	45	42	38	33	26.3	18		
4BLOCKm 2/9	0.55	0.75		70	67.5	63	57	49.5	39.5	26.5		
4BLOCKm 2/12	0.75	1		94	90	84	76	66	52.5	35.5		
4BLOCKm 2/18	1.1	1.5		140	135	126	114	99	79	53.5		

4BLOCK 4

MODEL	POWER (P ₂)		Q	Flow rate								
	kW	HP		m ³ /h	l/min	US g.p.m.	feet	US g.p.m.	feet			
Single-phase				0	1.2	1.5	2.4	3.6	4.5	6.0		
				0	20	25	40	60	75	100		
4BLOCKm 4/4	0.37	0.50	H metres	31.5	30	29.5	27.5	23.8	19.8	10		
4BLOCKm 4/6	0.55	0.75		47	44.5	44	41	35.5	29.5	15		
4BLOCKm 4/8	0.75	1		63	59.5	58.5	55	47.5	39.5	20		
4BLOCKm 4/13	1.1	1.5		102	97	95	89	77	64.5	32.5		

Q = Flow rate H = Total manometer head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.